COPYRIGHT - 2023 BY LINKO ELECTRIC COPYRIGHT

ECN NO.	REV.	MODIFICATION	DATE	DRAWN	APPROVED
N/A	A1	初版发行	2023/11/17	杨今心	宋星亮
				XXX	XXX

ENGINEERING DEPARTMENT 工程部 图档发行

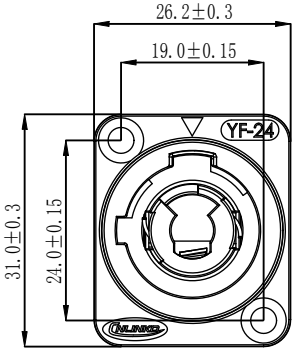





安装开孔尺寸
Mounting hole size
安装螺丝规格尺寸：M3
Mounting screw size





技术要求 Specifications:
1. 额定电流 Rated current: 20A
2. 额定电压 Rated voltage: 500V AC
3. 耐 电 压 Dielectric withstanding voltage (Max) : 2000V
4. 接触阻抗 Contact resistance (Max) : L和N:1mΩ 地线:5mΩ
5. 绝缘阻抗 Insulation resistance (Max) : 500MΩ
6. 适用线规 Wire gauge (Max) : 4.0~2.5mm²/12~14AWG
7. 适用线径(外被)Cable OD: /
8. 防护等级 IP code:IP44 (连接状态)
9. 机械寿命 Operating cycles(Min):≥500次
10. 工作温度 Operating temperature: -25℃ ~ +85℃
11. 紧固扭矩 Tightening torque: 0.4 N.M

编 码 原 则:
Part Number rules

YF-	24-	J	03	SX-	XX-	XXX	X
1	2	3	4	5	6	7	8

1. 产 品 系 列 : 以两个字母表示如LP/DH/BD/YF/YP/YW/YZ/LK....等.
   Type descriptions it can be LP/DH/BD/YF/YP/YW/YZ/LK, etc.
2. 产 品 型 号 : 24
   Product Size
3. 公 母 类 别 : C=公针 J=母针
   Interface type C=male pin/end J=female pin/end
4. 接 口 类 别 :
   Interface type
   非PIN针=00
   Non-pin type=00
   PIN针类：01=单芯 02=2芯 03=3芯 04=4芯.....
   Pin type:01=single pin 02=2 pin 03=3 pin 04=4 pin.....
5. 连接器类型 PE=插头 SX=插座 PP=对接插座
   Connector Type PE=Plug SX=Receptacle PP=Free Receptacle
6. 序 列 号Serial number : 01-99
7. 流 水 码Streaming code: 001-999
8. A ~Z 表示产品版本升级/Version Upgrade

X.X±0.3 X°±3°
X.XX±0.15 X.X°±1.0°
X.XXX±0.100 未注圆角R0.2
TOLERANCES UNLESS OTHERWISE SPECIFIED

深圳市凌科电气有限公司
SHENZHEN LINKO ELECTRIC CO.,LTD

DRAWN	杨今心	2023/11/17
CHECKED	杨武	2023/11/17
APPROVED	宋星亮	2023/11/17
UNIT: mm	SIZE:A4	SHEET:1/1
PORJ.	SCALE 1：1	

TITLE:
YF24型3芯两孔法兰母插座塑胶款
其它接线(左)

P/N: YF-24-J03SX-XX-XXX A1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LINKO ELECTRIC PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LINKO CORP.